



HAND PALLET TRUCK

Hand Pallet Truck with Digital Scale available

BF		2.5 ton	3.5 ton	5 ton
Capacity	Q(kg)	2500	3500	5000
Service weight	kg	70	90	105
Steering wheel	mm	ø200	ø180	ø200
Fork wheel	mm	ø80	ø75	ø84
Max. lift height	h3(mm)	185	175	195
Total height	h14(mm)	1224	1214	1240
Lowered fork height	h13(mm)	85	75	88
overall length	l1(mm)	1533/1603	1533/1603	1533/1603
Fork dimension	s/e/t	50/160/1150	50/160/1150	60/160/1150
Distance between fork-arms out side	b5(mm)	550	550	550
Distance between fork arms inside	b2(mm)	230	230	230
Ground clearance centre of wheel base	m2(mm)	16	16	16
Aisle width for pallets 1000x1200 crossways	Ast(mm)	1730/1800	1730/1800	1730/1800
Aisle width for pallets 800x1200 lengthways	Ast(mm)	1730/1800	1730/1800	1730/1800
Turning radius	Wa(mm)	1266/1336	1266/1336	1266/1336

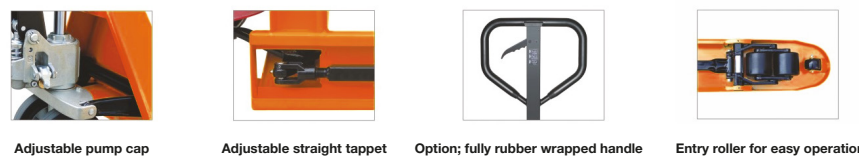


WIRE ROPE WINCH

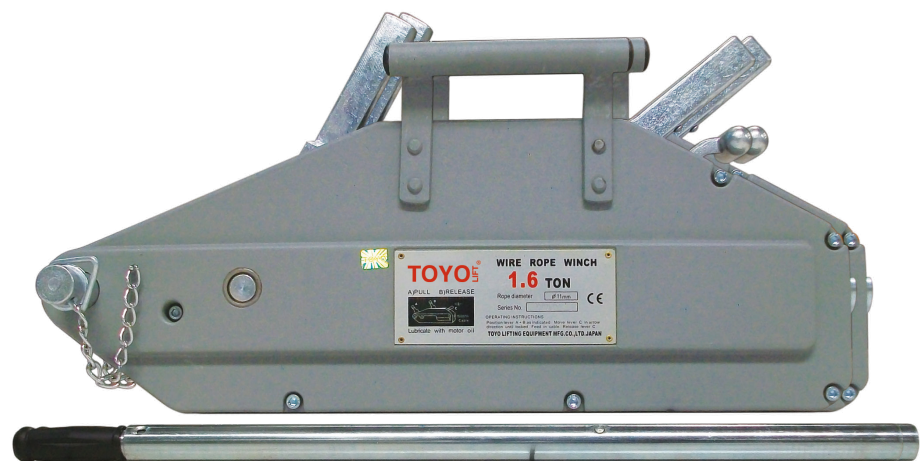

NEW 5.4 TON

Wire Rope Winch (Aluminium Body) [Model: TLW]					
MODEL	TLW008	TLW016	TLW032	TLW054	
Rated lifting capacity	ton	0.8	1.6	3.2	5.4
Rated pulling capacity	ton	1.25	2.5	5	8.1
Rated advance per full stroke	mm	60	60	40	40
Lever pull at WLL	kg	25	30	50	70
Rope diameter	mm	8.3	11	16	20
Standard length of wire rope	m	20	20	20	20
Net weight without cable	kg	7	14	23	45
Dimensions (mm)	A	426	545	660	940
	B	235	280	325	380
	C	168	190	230	280
	D	60	72	91	105
	E	64	97	116	120
	L1	—	80	80	80
L2	80	120	120	120	

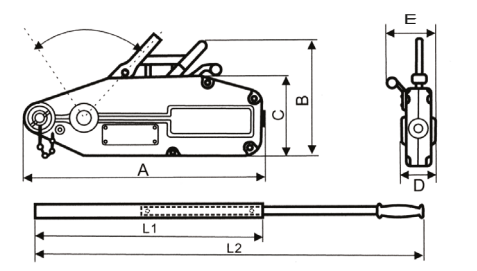

All dimensions are subject to change without prior notice


ELECTRIC CHAIN HOIST (SSDHL - Model)



Technical Parameters					
Capacity (ton)	Hoist lifting motor (Up & Down)				Hoist Weight (Kg)
	Lifting speed (M/Min)	Power (Kw)	Dia. of Chain	No. of Chain falls	
0.5	7.2	0.8	Ø6.3	1	53
1	6.6	1.5	Ø7.1	1	67
2	6.6	3.0	Ø10.0	1	120
3	4.4	3.0	Ø10.0	2	137
5	2.7	3.0	Ø11.2	2	148
7.5	1.8	3.0	Ø11.2	3	203
10	2.7	3.0x2	Ø11.2	4	344
15	1.8	3.0x2	Ø11.2	6	412
20	1.4	3.0x2	Ø11.2	8	522
25	1.1	3.0x2	Ø11.2	10	560

* Power supply - 380V/440V, 3PH, 50/60Hz, 1440RPM. All dimensions are subject to change without prior notice


ELECTRIC CHAIN HOIST WITH TROLLEY (SSDHL - Model)

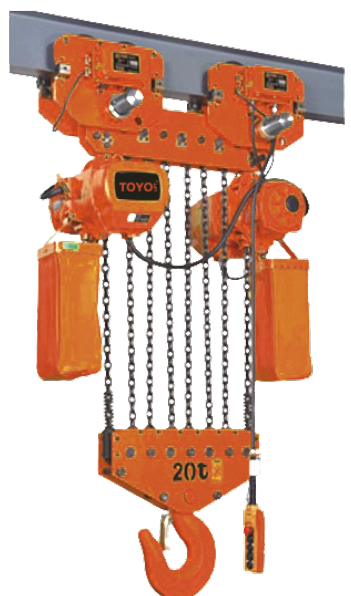

Technical Parameters							
Capacity (ton)	Power (Kw)	Trolley (Right & Left)		Chain Hoist (Up & Down)			Hoist & Trolley weight (Kg)
		Traveling speed (M/Min)	Beam width (mm)	Lifting speed (M/Min)	No. of Chain falls	Load chain dia. mm	
0.5	0.4	21	58-153	7.2	1	Ø6.3	80
1	0.4	21	58-153	6.6	1	Ø7.1	114
2	0.4	21	82-178	6.6	1	Ø10.0	175
3	0.75	21	100-178	4.4	2	Ø10.0	203
5	0.75	21	100-178	2.7	2	Ø11.2	236
7.5	0.75	21	100-178	1.8	3	Ø11.2	308
10	0.75	21	152-220	2.7	4	Ø11.2	489
15	0.75 x 2	21	152-220	1.8	6	Ø11.2	629
20	0.75 x 2	21	152-220	1.4	8	Ø11.2	777
25	0.75 x 2	21	152-220	1.1	10	Ø11.2	870

* Power supply - 380V/440V, 3PH, 50/60Hz, 1440RPM. All dimensions are subject to change without prior notice

ELECTRIC TROLLEY (DPC - Model)

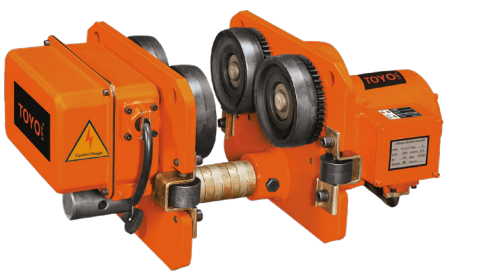

Technical Parameters				
Capacity (ton)	Power (Kw)	Beam width (mm)	Traveling speed (M/min)	Trolley weight (Kg)
0.5	0.4	58-153	21	30
1	0.4	58-153	21	47
2	0.4	82-178	21	55
3	0.75	100-178	21	66
5	0.75	100-178	21	88
7.5	0.75	100-178	21	105
10	0.75	152-220	21	145
15	0.75 x 2	152-220	21	217
20	0.75 x 2	152-220	21	255
25	0.75 x 2	152-220	21	310

* Power supply - 380V/440V, 3PH, 50/60Hz, 1440RPM. All dimensions are subject to change without prior notice



TOYOLIFT UK LTD.
5.PERCY STREET, OFFICE # 4, LONDON, W1T 1DG, UNITED KINGDOM
Tel. +44 (0) 87089-9846, Email.sales@toyolift.com
www.toyolift.com

Edition: October 2013

ToyoLift UK Ltd. will hold no liability for printing errors or mistakes




TOYO LIFT
Lifting & Material Handling Solutions

Edition: October 2013

MANUAL CHAIN HOIST

Characteristics

- Capacity ranges from 0.5T to 50T.
- Automatic double pawl braking system.
- Double cover protection.
- Light weight robust construction.
- Low effort to lift maximum load.
- Extra thick asbestos free friction discs.
- Fully forged hooks are fitted with safety latches as standard.
- Galvanized Zinc plated hand chain as standard.
- Sealed bearing.
- The hoist is fitted with high grade 80 alloy load chain.
- Complies with EC Council Directive 2006/42/EC, ASME B30.

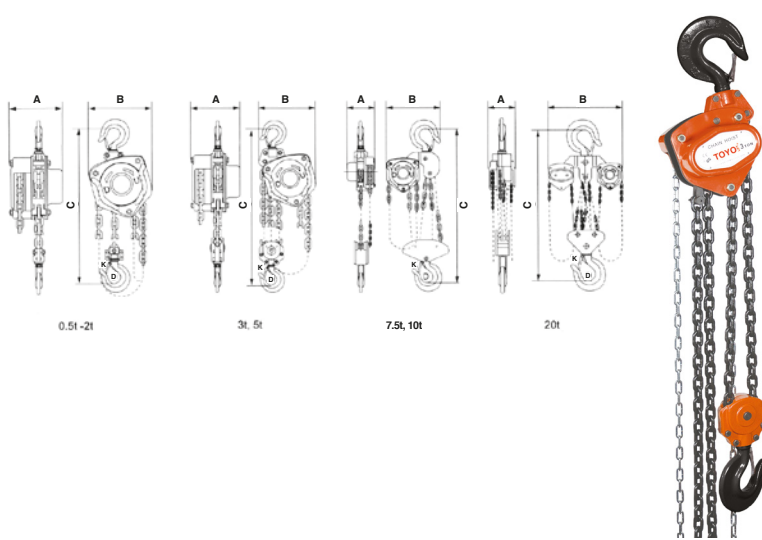

Chain Hoist [Model: TLB]												
Model		TLB-005	TLB-010	TLB-015	TLB-020	TLB-030	TLB-050	TLB-075	TLB-100	TLB-150	TLB-200	TLB-300
Capacity	Ton	0.5	1	1.5	2	3	5	7.5	10	15	20	30
Standard lift	m	3	3	3	3	3	3	3	3	5	5	5
Proof load	Ton	0.75	1.5	2.25	3	4.5	7.5	11.25	15	22.5	30	45
Effort required to lift rated load	N	200	320	360	365	385	435	435	435	435X2	435X2	435X2
No. of falls of load chain		1	1	1	1	2	2	3	4	8	8	12
Load chain	mm	6X18	6X18	8x24	8x24	8x24	10X30	10x30	10x30	10x30	10x30	10x30
(Dimensions mm)	A	137.5	146.5	170	170	170	190.4	190	190	209	209	312
	B	137	162	183	194	220	288	377	384	625	625	691
	C	270	317	399	414	465	618	768	798	890	890	1380
	D	35	35.5	45	42.5	50	64	64	85	110	110	110
	K	28	26	32.5	32	37	46	45	50	81	81	81
Net weight	Kg	9.3	11.4	16.7	18.5	21.2	41.8	61.6	81.7	209	209	292.5
Extra weight per metre of extra lift	Kg	1.7	1.7	2.3	2.3	3.7	5.3	7.5	9.7	18	18	27

Remarks : Hoists with the lift in other length are also available

MANUAL LEVER HOIST


Characteristics

- TOYO LIFT lever hoist is universal, manual hoist for tensioning and lashing in any direction.
- The ratchet lever hoist features compact design and robust, deep drawn, stamped steel construction.
- High quality materials ensure light weight without infringing reliability.
- Asbestos free brake, holding load at any desired height.
- Top & Bottom hooks are fitted with safety latches as standard.
- The load chain can be pulled freely and easily through the hoist in both directions to attach the load or to tension the chain.
- Short hand lever with rubber grip.
- Hand lever operates with little effort due to optimal gear ratio.
- Drop forged steel suspension & load hooks are heat treated.
- The hoist is fitted with high grade 80 alloy load chain.
- Complies with EC Council Directive 2006/42/EC, ASME B30.



Lever Hoist [Model: TLB]							
Model		TLB-050	TLB-075	TLB-150	TLB-300	TLB-600	TLB-900
Capacity	Ton	0.5	0.75	1.5	3	6	9
Standard lift	m	1.5	1.5	1.5	1.5	1.5	3
Proof load	Ton	0.75	1.12	2.25	4.5	9	13.5
Effort required to lift rated load	N	140	140	240	320	340	360
No. of falls of load chain		1	1	1	1	2	3
Load chain	mm	5x15	6x18	8x24	10x30	10x30	10x30
(Dimensions mm)	A	105	148	176	195	195	195
	B	78	88	102	109	109	109
	C	80	135	162	211	254	319
	D	35	37	45	50	64	85
Net weight	Kg	4	7.7	11.8	21	32	56.7
Extra weight per metre of extra lift	Kg	0.552	0.8	1.4	2.15	4.3	6.45

Remarks : Hoists with the lift in other length are also available. All dimensions are subject to change without prior notice



All dimensions are subject to change without prior notice

